


APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Electric Power Systems (EPS)
- Emergency backup power supplies
- Electronic apparatus and equipment
- Communication power supplies
- DC power supplies
- Auto control system

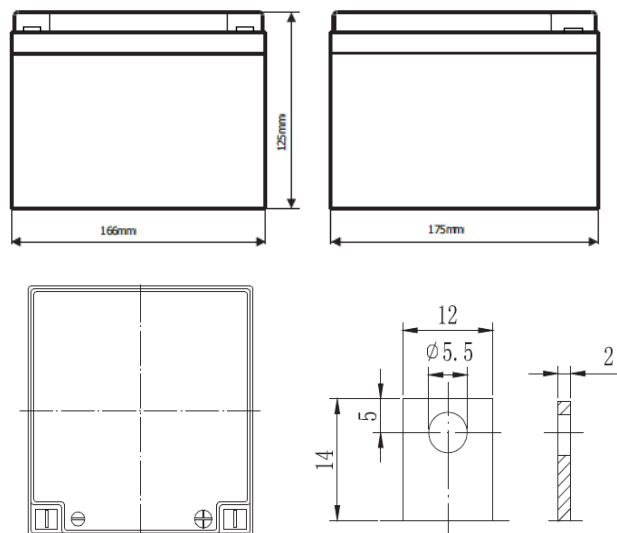

SPECIFICATIONS

Nominal Voltage	12 V	
Number of cells	6	
Design Floating Life (20°C)	10 years	
Dimensions	Length	175 mm
	Width	166 mm
	Height	125 mm
	Total Height	125 mm
Weight	7.90 kg	
Nominal Capacity (25°C)	20 hours rate (1.75)	26.0 Ah
	10 hours rate (1.75)	25.0 Ah
	5 hours rate (1.75)	21.2 Ah
	1 hour rate (1.65)	15.8 Ah
Internal Resistance (fully charged, 25°C)	12 mOhm	
Self Discharge	approx. 3% per month at 25°C	
Nominal Operating Temperature	25°C	
Operating Temperature range	Discharge	-15°C to 45°C
	Charge	0°C to 40°C
	Storage	-15°C to 40°C
Float Charging Voltage	2.27 to 2.30 V/cell at 25°C	
Temperature compensation	-20mV/°C	
Maximum charging current	7.80 A	
Maximum discharge current (25°C)	260 A (5 sec.)	
Short Circuit Current (25°C)	390 A	

PERFORMANCE DATA

Discharge Constant Current at 25°C (Amperes)


End Voltage (V/cell)	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	93.2	59.4	47.0	26.4	15.9	9.10	6.42	5.01	4.32	2.84	2.53	1.33
1.65V	89.6	57.0	45.8	25.9	15.8	8.88	6.38	4.98	4.30	2.83	2.52	1.32
1.70V	86.5	55.1	44.2	25.1	15.7	8.79	6.33	4.94	4.27	2.81	2.51	1.32
1.75V	82.7	52.7	42.6	24.5	15.5	8.58	6.28	4.91	4.24	2.78	2.50	1.30
1.80V	77.9	49.6	40.4	23.6	14.7	8.39	6.10	4.76	4.12	2.70	2.48	1.26

Discharge Constant Power at 25°C (Watts/Cell)


End Voltage (V/cell)	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	173	111.6	88.4	51.9	31.0	17.5	12.6	9.88	8.62	5.73	5.12	2.71
1.65V	167	107.2	86.1	50.4	30.6	17.1	12.6	9.83	8.57	5.70	5.10	2.70
1.70V	161	103.6	83.0	47.7	29.8	16.9	12.5	9.76	8.50	5.69	5.06	2.68
1.75V	154	99.0	80.1	46.5	29.3	16.7	12.4	9.69	8.45	5.63	5.03	2.68
1.80V	145	93.3	76.0	44.8	28.3	16.3	12.0	9.41	8.19	5.52	4.93	2.52

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Temperature Effects on Float Life

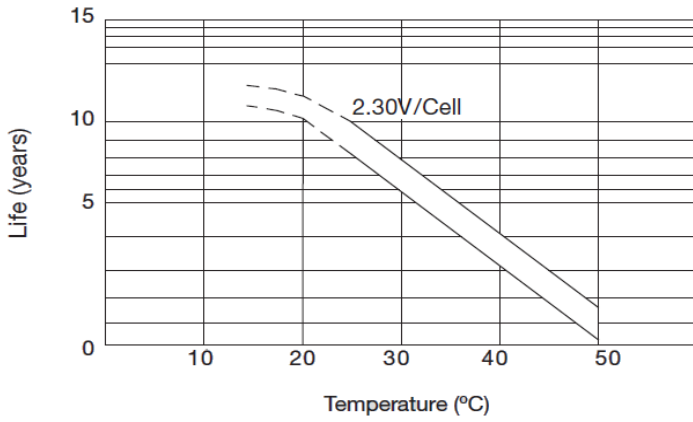


Self Discharge Characteristics

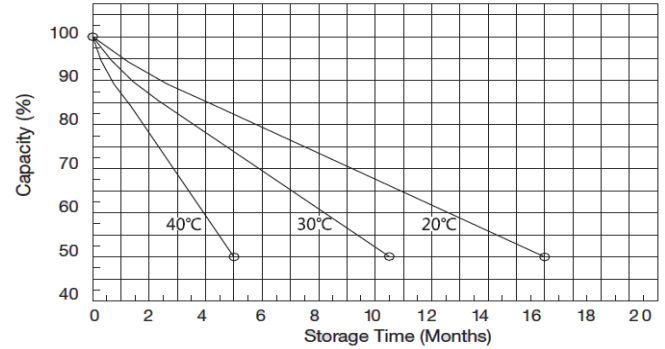


Discharge Characteristics (25°C)

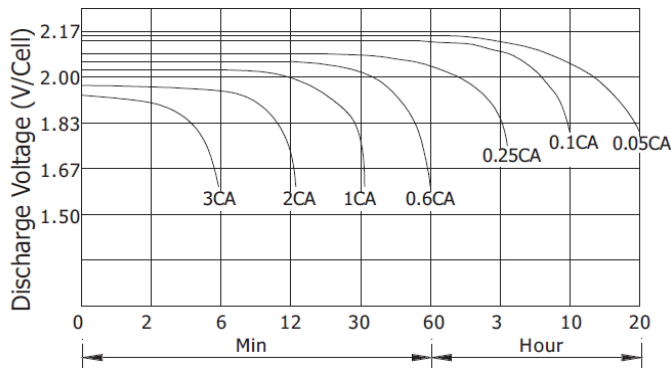

Charging Characteristics (25°C)

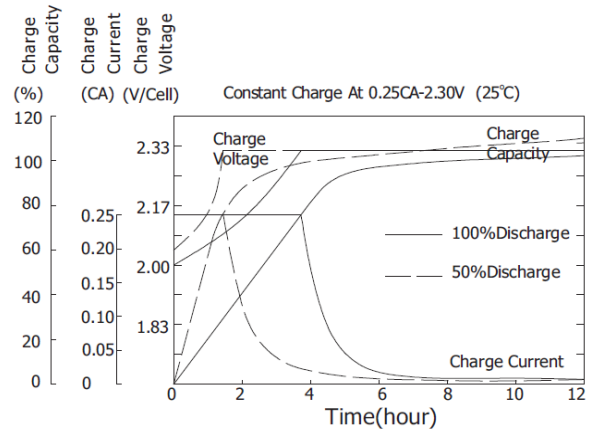

Cycle Service Life in Relation to Depth of Discharge

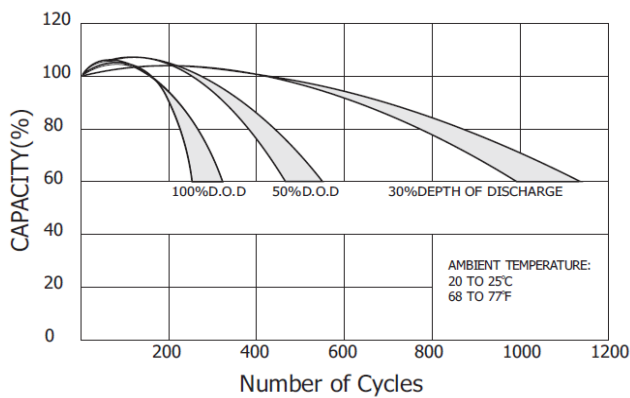

Relationship Between OCV and Residual Capacity (25°C)

